

Ideal Current Controlled Current Source VTB Model

Author: Vladimir Lyashev

Date: 05/30/2003

Model name: CCCS

DLL name: CCCS_030530

Version number: 1.1

Report errors or changes to: ljashev@tsure.ru

Pictorial Representation of Model

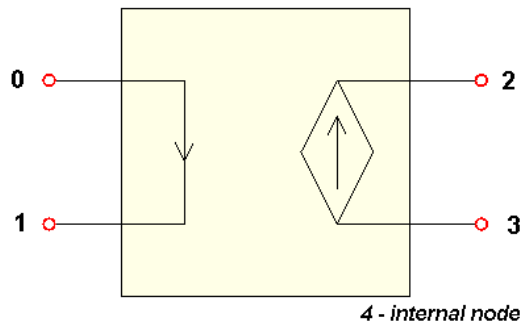


Figure 1. Pictorial representation

Brief Description of Model

The model represents an ideal CCCS with gain factor.

Model Validity Range and Limitations

None.

List of Model Pins with Connectivity Information

Pin Designation	Description
Terminal 0 & terminal 1	Input connectors
Terminal 2 & terminal 3	Output connectors

List of Parameters and Output Variables

This is a complete list of all parameters of the model. All models use SI units.

Parameter Name	Description	Default Value	Units
Gain	Gain factor	1	nounit

This is a list of output variables.

Variable Name	Description	Units
Output Current	Output current by figure 1	Amperes
Output Voltage	Output voltage equal v_2-v_3	Volts
Input Current	Input current by figure 1	Amperes

Assumptions in Model Derivation

The model is ideal element.

Mathematical Description of Model

The model is based on the equations:

$$V_0 - V_1 = 0;$$

$$I_{out} = k * I_{in}.$$

The RC model form is

$$\begin{bmatrix} 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & -1 \\ 0 & 0 & 0 & 0 & -k \\ 0 & 0 & 0 & 0 & k \\ 1 & -1 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} v_0 \\ v_1 \\ v_2 \\ v_3 \\ I \end{bmatrix} = \begin{bmatrix} i_0 \\ i_1 \\ i_2 \\ i_3 \\ 0 \end{bmatrix}, \quad \text{where } I = i_0 = I_{in}.$$

Example of Model Use

Example is shown in fig.2.

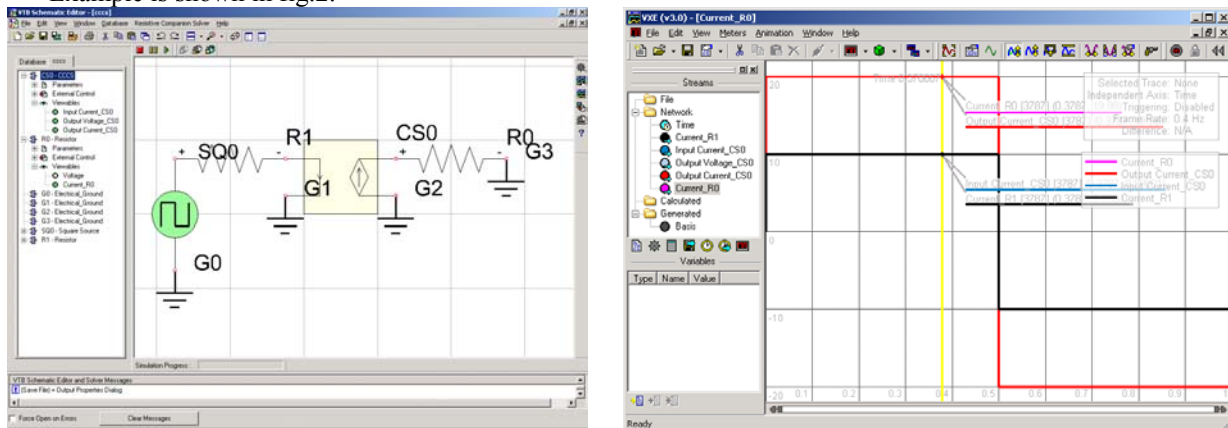


Figure 2. Example of model use

Model Validation

Model was validated by comparing VTB results to analytic solution.

References

J. Vlach, K. Singhal Computer Methods For Circuit Analysis And Design, NY, 1983.